

PHILIPS

Panel RC065B/RC125B/
RC126B/RC127V/RC128V

Accessories

<p>Suspension set: RC125Z SME-2 WH 910930031418</p>	<p>PCV set: RC125Z SMB-PLC 910930031318</p>	<p>Safety cable: RC125Z SC 910930031518</p>	
<p>Surface mounted set: RC125Z SMB W60L60 910930031018</p>	<p>Safety cable: RC125Z SC 910930031518</p>		



IP20



Configuration types (Ceiling only)			Size type	
RC125Z SME-2 WH		for RC065B/RC125B/RC126B		0.35
RC127Z SME-2 WH	Suspension	for RC127V/RC128V		0.35
RC127Z SME-4 WH				0.35
RC125Z SMB-PLC	Plaster ceiling version (PCV)	for RC065B/RC125B/RC126B/RC127V/RC128V		0.08
RC125Z SMB W60L60		for RC065B/RC125B/RC127V	W60L60	1.00
RC126Z SMB W62L62	Surface mounted (SM)	for RC126B/RC128V	W62L62	1.04
RC125Z SMB W30L120		for RC127V	W30L120	1.24
RC125Z SC	Safety cable	for RC065B (safety cable not included) for RC125B/RC126B/RC127V/RC128V (safety cable already included)		0.02

Suspended

	A (mm)	B (mm)
RC065B W60L60	535	535
RC125B W60L60	531	531
RC126B W62L62	556	556
RC127B W60L60	528	528
RC127B W30L120	686	160
RC128B W62L62	553	553

Don't re-use the disassembled screws.

PSU

0.5Nm

2x 0.75-1.5mm²

Ø6-13mm

7

click

8

90°



9



PCV plaster ceiling version



	A (mm)	B (mm)
RC W60L60	570	570
RC W62L62	590	590
RC W30L120	1100	270

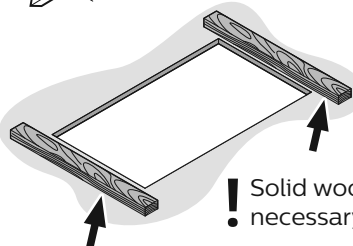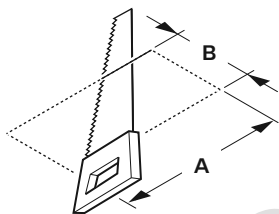


! Solid wood if necessary




Safety cable:


RC125Z SC
910930031518
- recommended for plaster ceiling mounting.

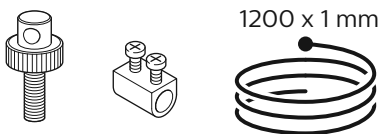




1a

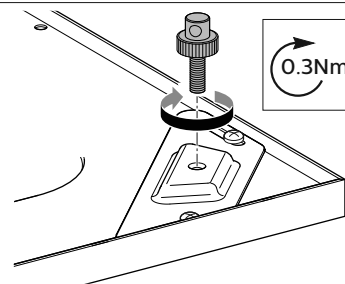


1b

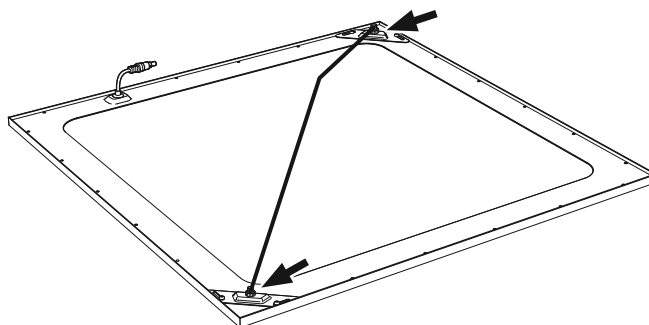


Don't re-use the screw that fix the corner brackets.

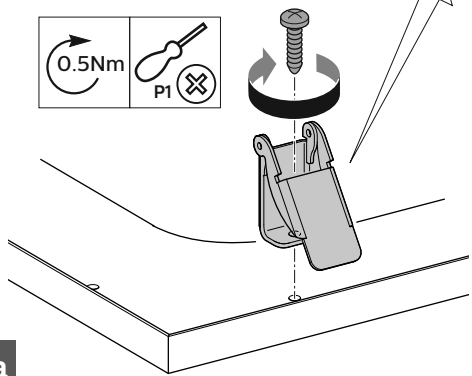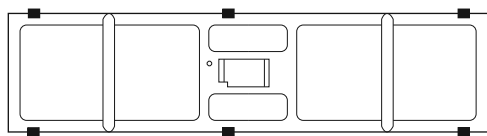




2a

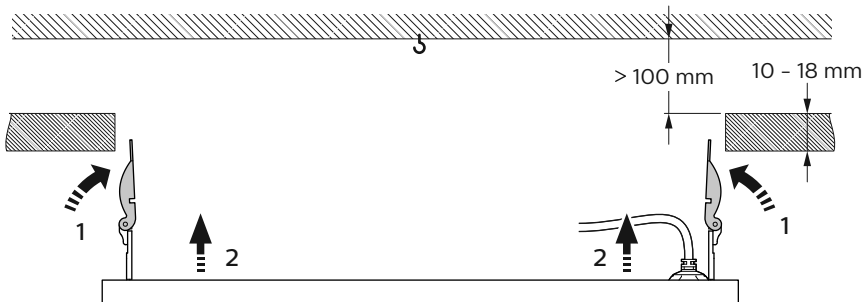

2b

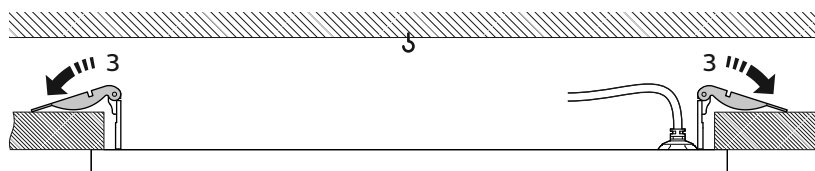


Safety cable

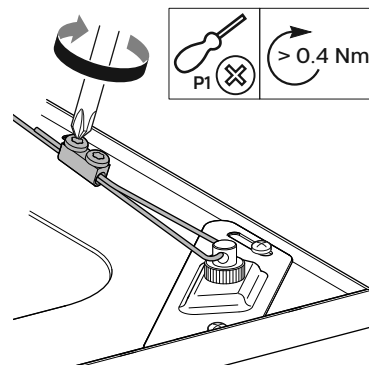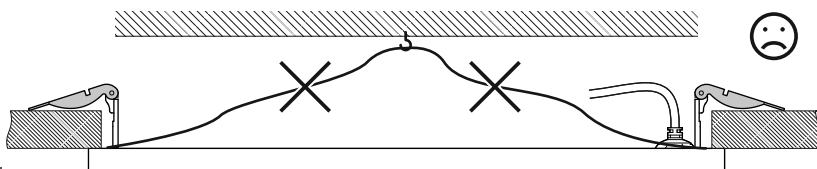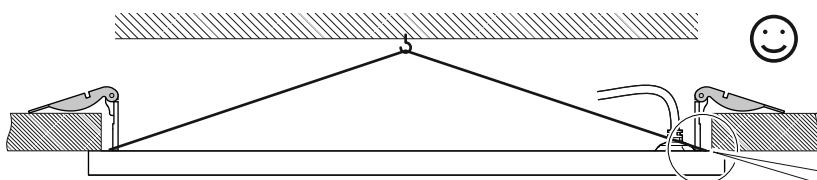



3



Surface mounted

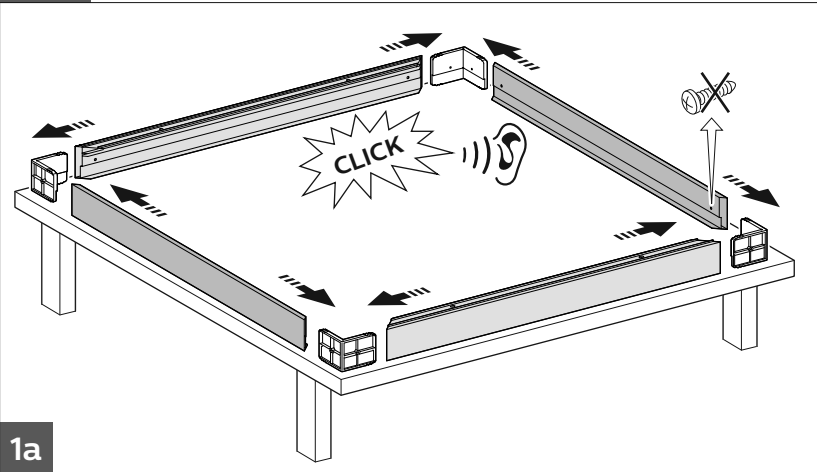


1a

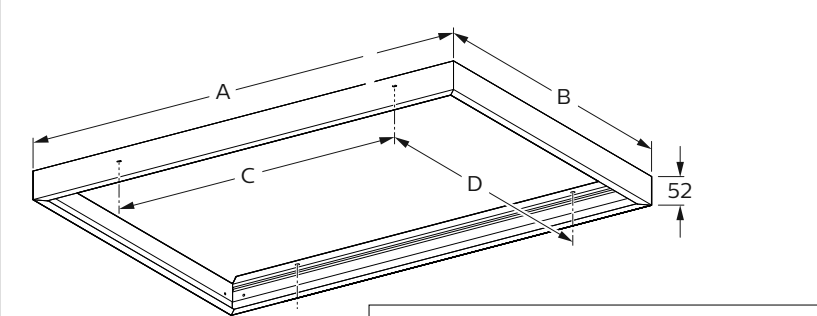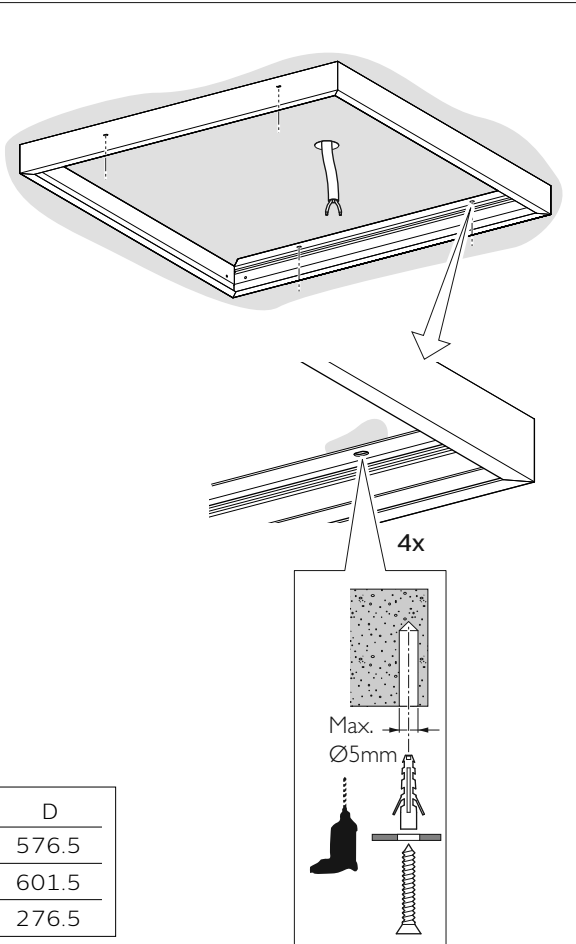


	A	B	C	D
W60L60	612	612	332	576.5
W62L62	637	637	327	601.5
W30L120	1212	312	632.0	276.5

1b


2 Electrical connections. See relevant installation instruction.

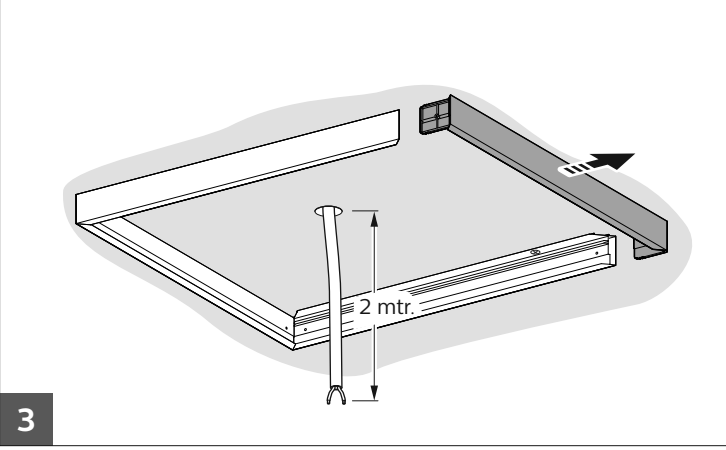

3

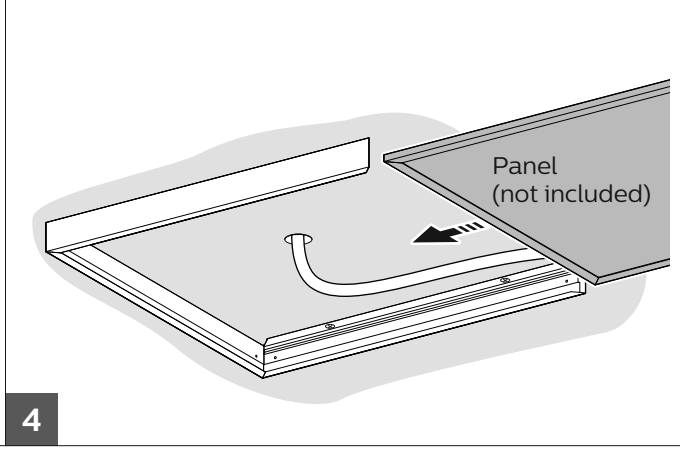



4

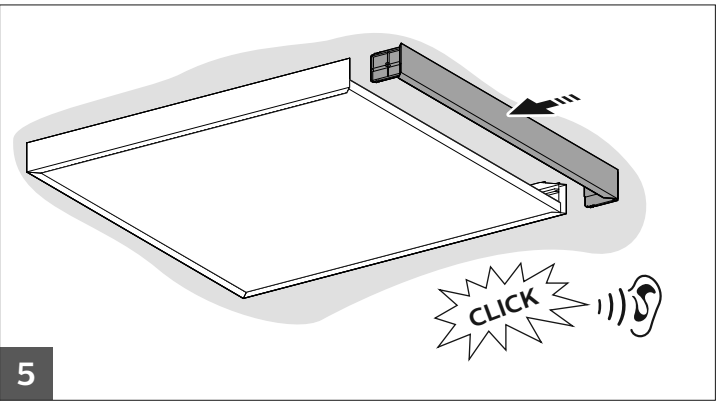

5

The light source of this luminaire is not replaceable; when the light source reached its end of life the whole luminaire shall be replaced.

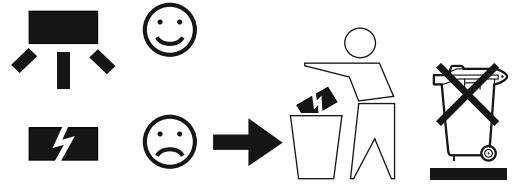



© 2016 Philips Lighting Holding B.V.
All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.
The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.
Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Philips Lighting Holding B.V.
The Netherlands