



## Galvanised steel flat conductor

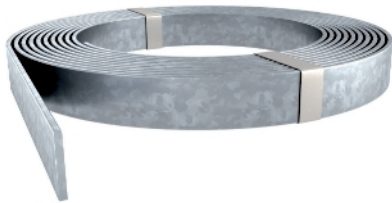

- According to DIN EN 62561-2 (VDE 0185-561-2)
- Meets the requirements of VDE 0185-305 (IEC 62305)
- Zinc coating: 500 g/m<sup>2</sup> (approx. 70 µm)
- For lightning protection, earthing systems and ring equipotential bonding

Type	Dimension W x H mm	Cross- section mm <sup>2</sup>	Normal ring ca. m	Normal ring ca. kg	Weight kg/100 m	Item No.
5052 DIN 20X2.5	20 x 2,5	50	122	50	41,000	5019340
5052 DIN 25X3	25 x 3	75	84	50	59,700	5019342
5052 DIN 30X3	30 x 3	90	71	50	70,650	5019344
5052 DIN 30X3.5	30 x 3,5	105	30	25	84,000	5019345
5052 DIN 30X3.5	30 x 3,5	105	60	50	84,000	5019347
5052 DIN 30X4	30 x 4	120	52	50	97,000	5019350
5052 DIN 40X4	40 x 4	160	40	51	128,000	5019355
5052 DIN 40X5	40 x 5	200	30	50	162,000	5019360

### Dimensions

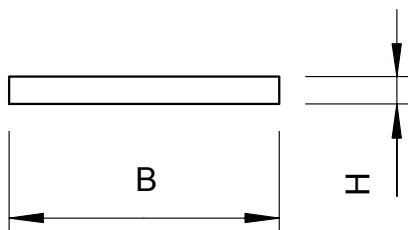

**St** Steel

**FT** Hot-dip galvanised