


Binary inputs

4gang binary input, flush-mounted
for ABB-free@home®

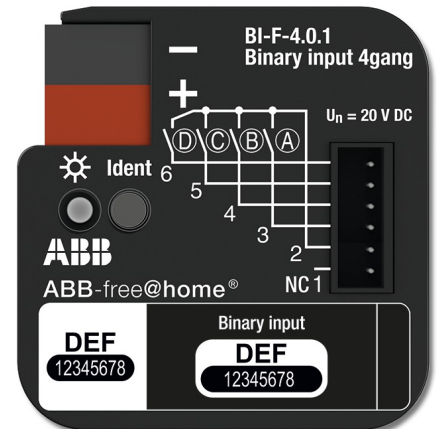

Conventional push-buttons or auxiliary contacts can be connected to 4 channels. The information of the contact enquiry can be used for activating ABB-free@home® actuators or for recording status information.

The contact polling voltage is made available from the binary input itself. Extension of the connecting cables possible by a maximum of 10 m.

Flush-mounted device for installation in a 60 mm device box or distribution box.

The bus can be connected via enclosed terminal block.

Bus voltage: 24 V,

Inputs: 4, Polling voltage: 20 V-

Protection class (Device): IP 20, Temperature range (Device): -5 °C to 45 °C,

Dimensions: (L x W x D): 39 mm x 40 mm x 12 mm,

Programming only with bus voltage applied via the web interface of the System Access Point., Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current Online-Catalogue.

Order Code : 2CDG510003R0011

Article No. : BI-F-4.0.1

EAN: