

Emergency Fixtures DP-8011 LED



Construction


Housing: polycarbonate

Description


Battery info: 3.6V 2Ah Ni-Cd
 Charging time: 24 h, first charging time
 36 h
 Duration: 3 h
 Non-maintained

Package contains three exchangeable lenses – narrow beam, corridor and wide angle round.


NARROW BEAM: DP-8011LC

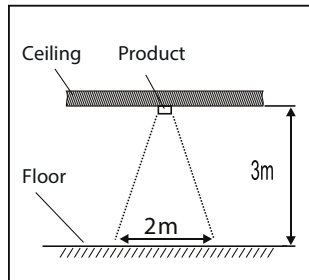

CORRIDOR: DP-8011LX

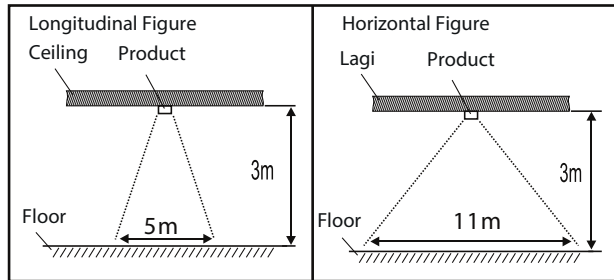

WIDE ANGLE ROUND: DP-8013LK

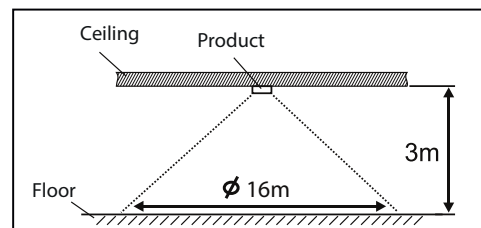

Code	Lamp	Protection level	Size mm (LxWxH)	Input voltage	Working temp.	Light source
EX-DP8011LC-NM	2,8W	IP20	130x130x45	220/240V 50/60Hz	0-40°C	LED 158Lm

Importer: Alter Baltics OÜ