

XVUZ02

Fixing plate with 100mm aluminium pole for modular tower lights, Harmony XVU, black, 60mm



Galvenā

Produkta sērija	Harmony XVU
Produkta vai sastāvdaļas veids	Modular tower light
Aksesuāru / rezerves daļu tips	Fixing plate
Aksesuāru / rezerves daļu kategorija	Mounting and fixing accessory
Component name	XVU
Mounting diameter	60 mm

Papildinošs

Pole height	100 mm
Montāžas stiprinājums	Plate with pole
Product compatibility	Top AC body Top DC body Top swivel mounting support
Material	PBT (polibutilēna tereftalāts) V-0 UL 94 ABS (akrilnitrila butadiēna-stirols) PC (polikarbonāts) Alumīnija
Korpasa krāsa	Black
Savienojuma vieta	lespiest
[Us] rated supply voltage	24 V AC/DC 110...240 V AC
Garums	117 mm
Neto svars	0,132 kg

Vide

Apkārtējā gaisa temperatūra uzglabāšanai	-40...70 °C
Apkārtējā gaisa temperatūra darbībai	-25...50 °C
IP degree of protection	IP65
Produkta sertifikācija	CSA[RETURN]UL[RETURN]CE

Iepakojšanas vienības

Pirmā iepakojuma vienības tips	PCE
Vienību skaits 1. iepakojumā	1
1. iepakojuma augstums	9,1 cm
1. iepakojuma platums	26,8 cm
1. iepakojuma garums	9,0 cm
1. iepakojuma svars	285,0 g
Otrā iepakojuma vienības tips	S03
Vienību skaits 2. iepakojumā	12
2. iepakojuma augstums	30,0 cm
2. iepakojuma platums	30,0 cm


2. iepakojuma garums	40,0 cm
2. iepakojuma svars	4,481 kg
Trešā iepakojuma vienības tips	PAL
Vienību skaits 3. iepakojumā	96
3. iepakojuma augstums	60,0 cm
3. iepakojuma platums	80,0 cm
3. iepakojuma garums	70,0 cm
3. iepakojuma svars	35,36 kg

Piedāvājiem ilgtspēju

Ilgspējīgs piedāvājuma statuss	Green Premium izstrādājums
REACH regula	REACH Deklarācija
ES RoHS direktīva	Proaktīva atbilstība (uz izstrādājumu neattiecas ES RoHS juridiskās saistības)
Nesatur dzīvsudrabu	Jā
Ķīnas RoHS regula	Ķīnas RoHS Deklarācija
Informācija par RoHS izņēmumiem	Jā
Vides informācijas publicēšana	Produkta Ietekme Uz Vidi
Cirkularitātes profils	Informācija Par Eksploatācijas Izbeigšanu

Fixing Unit - Plate with Pole

Dimensions




Modular Tower Lights Mounting



Drawing	Part number	Part name
A1	-	Top cover
-	Top cover (Silver)	
A2	XVUC9S	Buzzer unit
XVUC9SQ	Buzzer unit (Silver)	
A3	XVUC23	Green LED unit
XVUC24	Red LED unit	
XVUC25	Orange LED unit	
XVUC26	Blue LED unit	
XVUC27	White LED unit	
XVUC28	Yellow LED unit	
A4	XVUC29	Multi-LED unit
A5	XVUC29P	Multi-LED unit, Pulse signal
A6	XVUC9V	Sound unit
A7	XVUC9VP	Sound unit, Pulse signal
A8	XVUC020	Extender
XVUC020Q	Extender (Silver)	
A9	XVUC21B	DC body

Drawing	Part number	Part name
XVUC21BQ	DC body (Silver)	
A10	XVUC21M	AC body NPN
XVUC21MP	AC body PNP	
XVUC21MQP	AC body PNP (Silver)	
A11	XVUZ06	Flexible option
A12	XVUZ01	Fixing Unit - Direct mounting (3 pins)
XVUZ01Q	Fixing Unit - Direct mounting (Silver,3 pins)	
XVUZ03	Fixing Unit - Direct mounting (2 pins)	
XVUZ04	Fixing Unit - Direct mounting (4 pins)	
A13	XVUZ02	Fixing Unit - Plate with Pole (100 mm)
XVUZ02Q	Fixing Unit - Plate with Pole (100 mm, Silver)	
XVUZ400	Fixing Unit - Plate with Pole (400 mm)	
XVUZ800	Fixing Unit - Plate with Pole (800 mm)	
A14	XVUZ05	Fixing Unit - Plate with adjustment pole (100-385 mm)
A15	XVUC43	Green LED unit, Flash
XVUC44	Red LED unit, Flash	
XVUC45	Orange LED unit, Flash	
XVUC46	Blue LED unit, Flash	
XVUC47	White LED unit, Flash	
XVUC48	Yellow LED unit, Flash	
A16	XVUZ100T	Fixing Unit - Metal bracket with pole (100 mm)
XVUZ250T	Fixing Unit - Metal bracket with pole(250 mm)	
XVUZ400T	Fixing Unit - Metal bracket with pole (400 mm)	
A17	XVUZ12	Fixing plate for use on vertical support - black

Modular Tower Lights Mounting

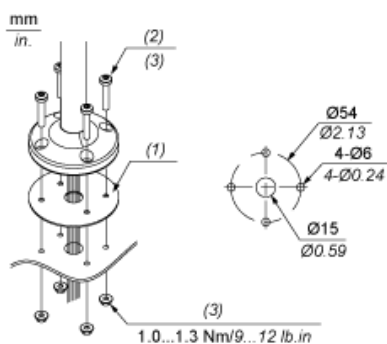

- (1) Gasket
- (2) Screw x 4 (unattached)
- (3) M5 x (thickness+10 mm /0.39 in.)

Illuminated Units, Multi-LED and Audible Units Wiring



- (A) Fixing Unit
 - (1) Dimensions of Wiring size
 - (2) Push-in Wire Connectors
 - (3) Fuse : 2A ,250V
 - (4) Fuse : 0.5A ,125V
 - (5) Modular Tower Lights 24V AC/DC
 - (6) Modular Tower Lights 100...240V AC
- L1 to Illuminated LED Units
L5 :