

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Schneider Electric

**Supplier's address:** Support, [www.se.com/ww/en/work/support/country-selector/contact-us.jsp](http://www.se.com/ww/en/work/support/country-selector/contact-us.jsp)  
SCHNEIDER ELECTRIC INDUSTRIES SAS, 35 rue Joseph Monier, 92500 Rueil Malmaison, France

**Model identifier:** IMT47223

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Soldered		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	200	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	21 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500
On-mode power ( $P_{on}$ ), expressed in W	200,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	66	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	293	
	Depth	263	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,382 0,380
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	8 200	Beam angle in degrees, or the range of beam angles that can be set	110
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	0	Survival factor	0,90
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. <sup>(b)</sup>	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4


(a).': not applicable;

(b).': not applicable;

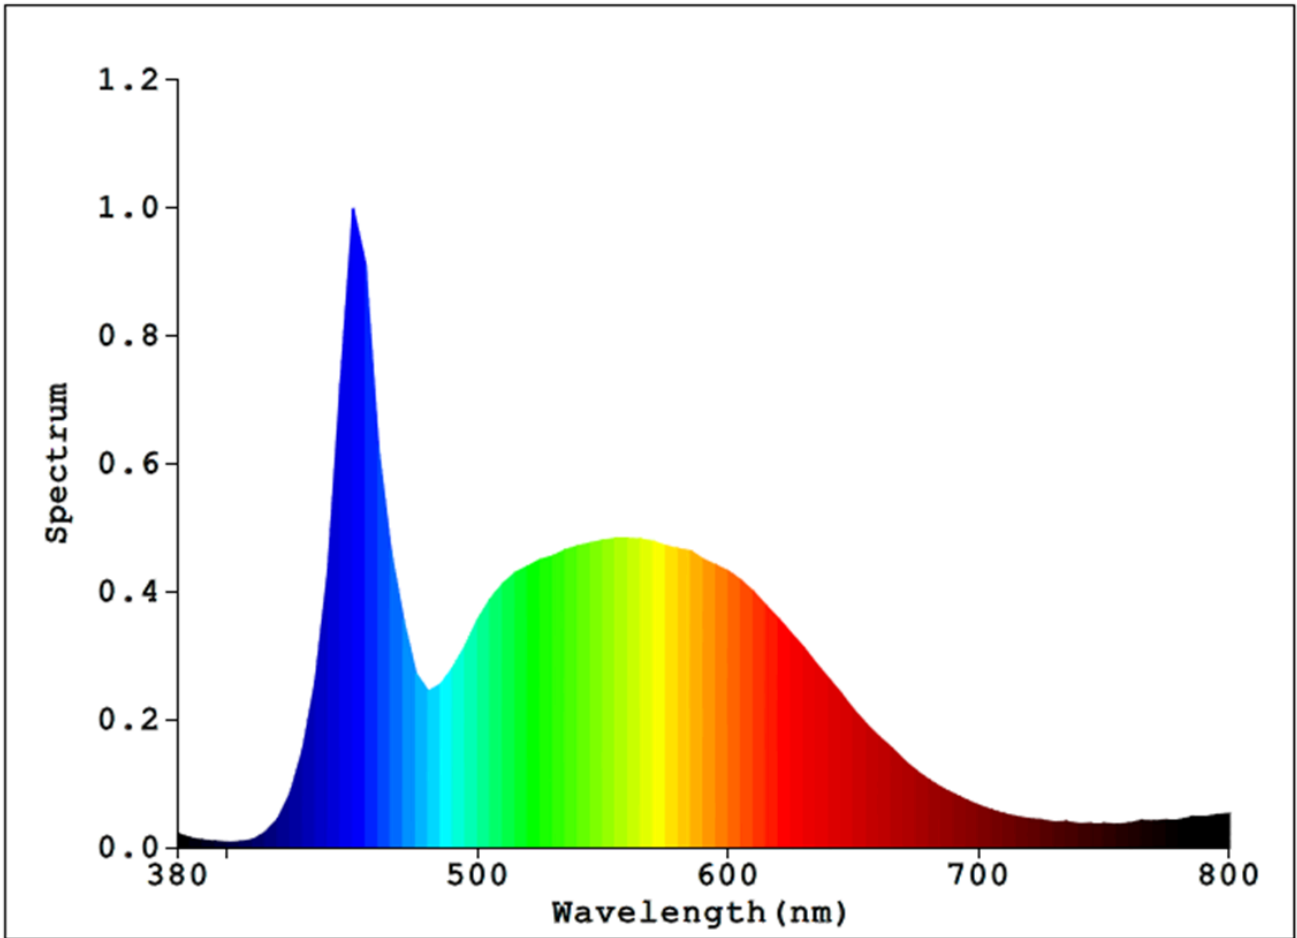

Internal

Model placed on the Union market from 06/09/2021



**EPREL registration number:** 701693

<https://eprel.ec.europa.eu/qr/701693>

**Supplier:** SCHNEIDER ELECTRIC INDUSTRIES SAS (Manufacturer)

**Website:** [www.se.com](http://www.se.com)

**Customer care service:**

**Name:** Support

**Website:** [www.se.com](http://www.se.com)

**Email:** [e-label@se.com](mailto:e-label@se.com)

**Phone:** Support number

**Address:**

[www.se.com/ww/en/work/support/country-selector/contact-us.jsp](http://www.se.com/ww/en/work/support/country-selector/contact-us.jsp)

SCHNEIDER ELECTRIC INDUSTRIES SAS, 35 rue Joseph Monier, 92500 Rueil Malmaison, France